
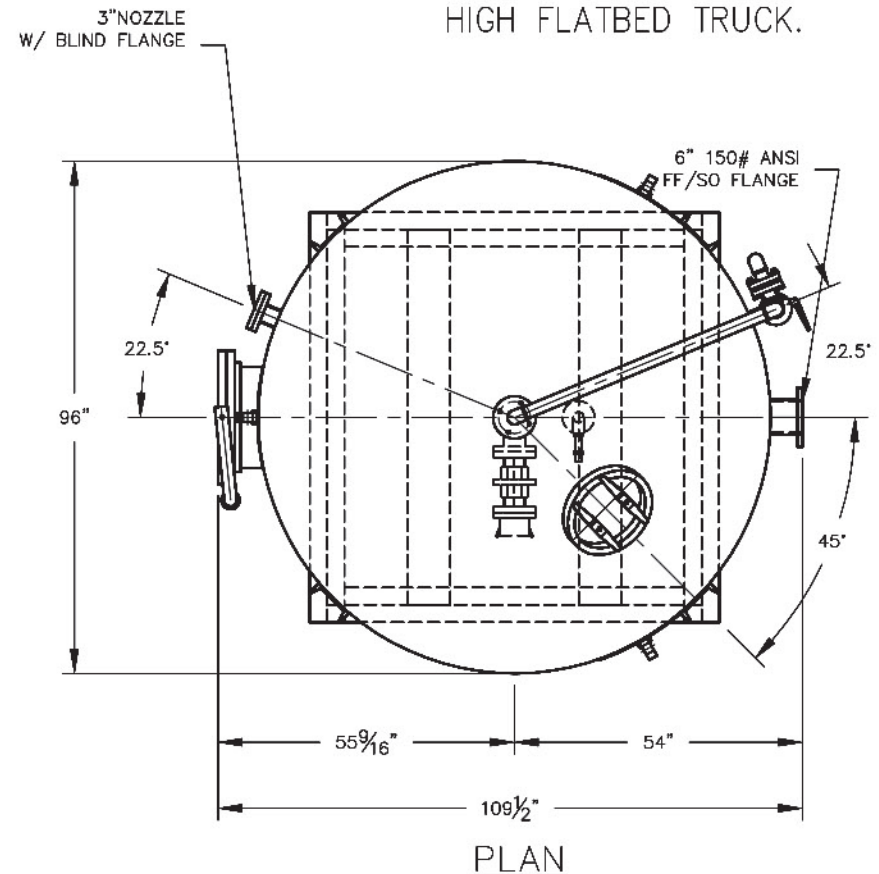


NOTE: SEE PLAN VIEW FOR CORRECT ORIENTATIONS.
VESSEL MUST SHIP ON 18" HIGH FLATBED TRUCK.

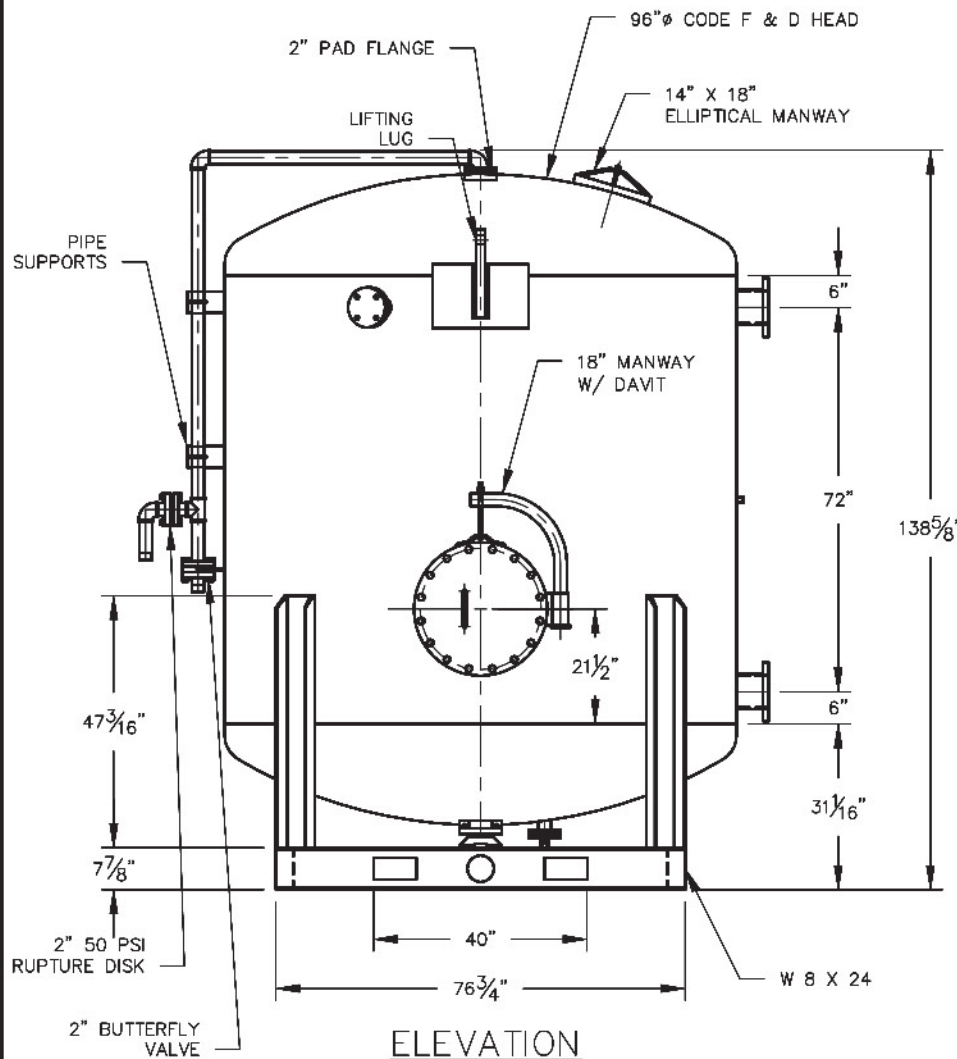

VESSEL STANDARDS

VESSEL MATERIALS : SA 516 70	LIQUID DRAIN ASSEMBLY : CARBON STEEL
LINING : HIGH SOLIDS EPOXY	VOLUME OF VESSEL : 400 FT ³
EXTERIOR PAINT : ACRYLIC ALKYD ENAMEL	STANDARD/MAX CARBON FILL : 8,000 LBS / 10,000 LBS
HEAD THICKNESS : 5/16" CODE F&D	SHIP WT. OPERATING WT. STD. FILL : 14,500 LBS / 26,000 LBS
SHELL THICKNESS : 5/16" 516 - 70	CARBON TYPE : 12 X 40
INTERNALS : PVC	MAX. OPERATING PRESSURE : 50 PSIG
ADSORBENT OUTLET ASSEMBLY : 14" X 18" MANWAY	MAX. OPERATING TEMP. : 140°F

1	REVISE CARBON WEIGHT			JB 1/20/04
NO.	REVISION			BY DATE
PROJECT		 newterra®		
STANDARD				
PROJ. NO. SALES				
P.O. NO.				
THIS DRAWING AND DESIGN ARE THE PROPERTY OF NEWTERRA AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART, NOR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIFICALLY PERMITTED IN WRITING BY TIGG CORP. RETURN ON DEMAND.				
DRAWN BY JB				
DESIGN BY BL				
CHKD. BY BL				
DATE 7/5/02				
SCALE NTS				
DWG. NO.		C-500		REV. 1
		C-500-1001		



C-500