
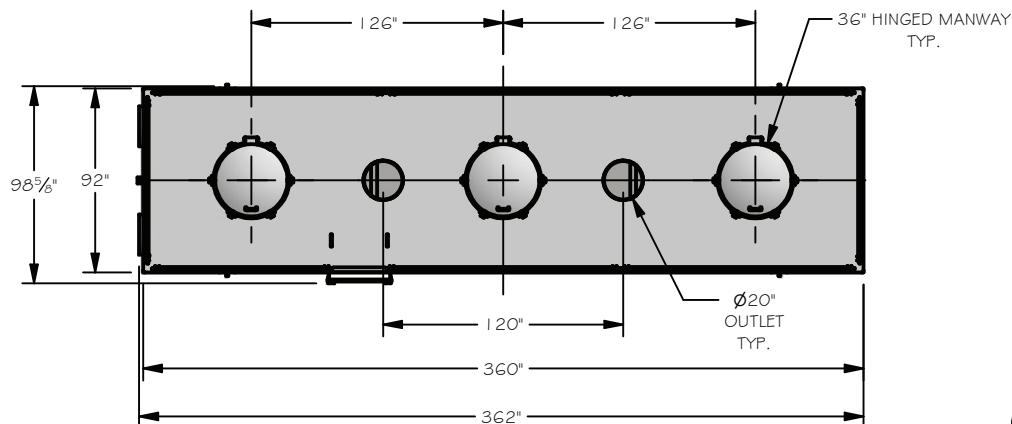
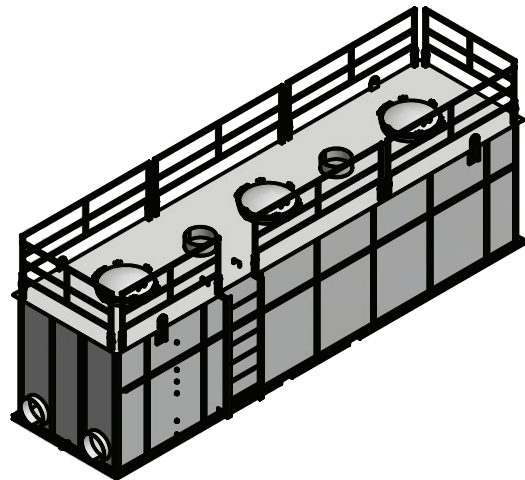
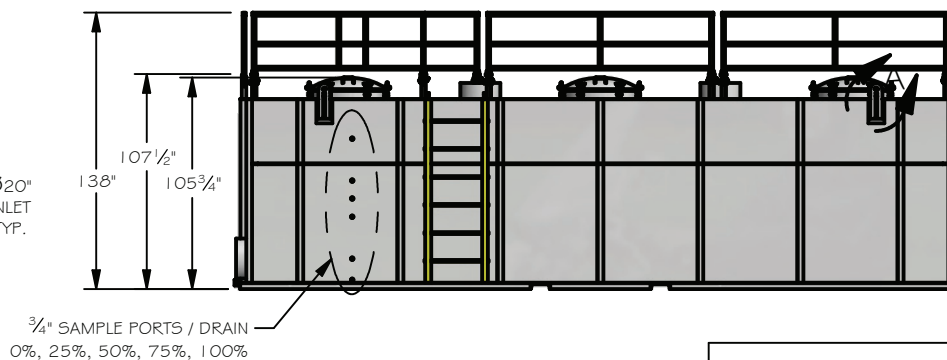


DETAIL A
LIFT LUG HOLE

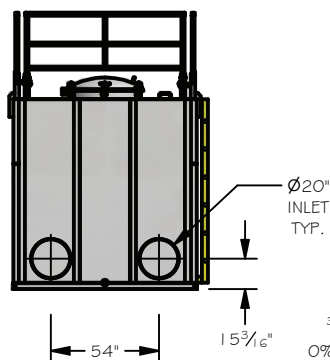

VESSEL STANDARDS

VESSEL MATERIALS: 3A-3G
 INTERIOR COATING: INTERLINE 850
 EXTERIOR COATING: HYDROPLATE 1086 BASE / CARBOTHANE 134 HG TOP (WHITE / YELLOW)
 INTERNALS: 304 STAINLESS STEEL POR-O-SEPTA
 VESSEL ACCESS: 36" HINGED MANWAY
 LIQUID DRAIN: 2" NPT W/ PLUG
 EMPTY SHIP WEIGHT: 15,000 LBS
 MAX. OPERATING PRESSURE: 1 PSIG
 MAX. OPERATING TEMPERATURE: 180°F
 VOLUME OF MEDIA BED: 640 CU.FT.
 LIFTING METHOD: LIFT LUGS (QTY. 4)

REVISION HISTORY			
REV	DESCRIPTION	BY	DATE
11	ADDED LIFT LUG HOLE DETAIL & PAINT DETAIL	JAK	12/5/2024
10	TITLE BLOCK UPDATE	CRM	1/10/2023

PROJECT		 newterra®	
NB-20			
PROJ. NO.		THIS DRAWING AND DESIGN ARE THE PROPERTY OF NEWTERRA AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART. NOR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIFICALLY PERMITTED IN WRITING BY NEWTERRA THIS DRAWING LOANED SUBJECT TO RETURN BY DEMAND.	
SALES			
PO. NO.		GENERAL ARRANGEMENT	
DRAWN BY			
JB			
DESIGN BY			
JB			
CHECKED BY			
JI		NB-20-GA-001	
DATE			
11/20/2011			
SCALE		11	
NTS			