


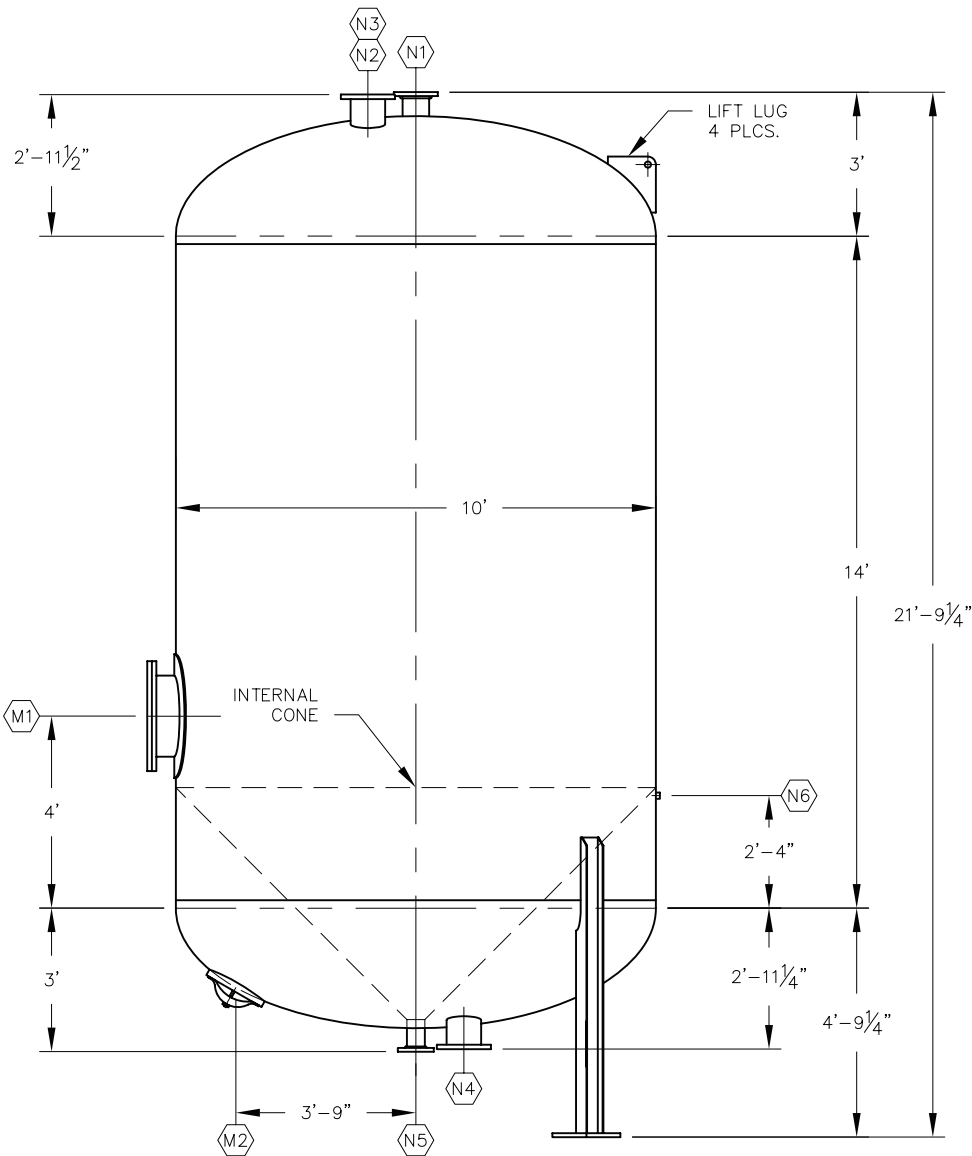


NOTES:

- 1) MATERIAL : SA-516-70
- 2) DESIGN PRESSURE: 75 PSIG @ 150°F
- 3) ALL FLANGES EXTEND 6" FROM SHELL UNLESS OTHERWISE NOTED.
INSIDE EXTENSIONS TO BE FLUSH.
- 4) ALL INTERNAL WELDS GRIND SMOOTH.
- 5) INTERNAL LINNING: PLASITE 4110

WEIGHTS:

SHIPPING: 15,000#
FULL OF WATER: 101,000#
MAXIMUM MEDIA VOLUME: 800 FT³

N6	VENT	1" NPT	SHELL
N5	CARBON OUT	4" 150# FLANGE	BOTTOM HEAD
N4	OUTLET/BACKWASH IN	8" 150# FLANGE	BOTTOM HEAD
N3	VENT/CARBON IN	4" 150# FLANGE	TOP HEAD
N2	BACKWASH OUT	8" 150# FLANGE	TOP HEAD
N1	INLET	6" 150# FLANGE	TOP HEAD
M2	MANWAY	12" x 16" ELL. MANWAY	BOTTOM HEAD
M1	MANWAY	20" MANWAY W/ DAVIT	SHELL
MARK	SERVICE	DESCRIPTION	LOCATION
NOZZLE SCHEDULE			

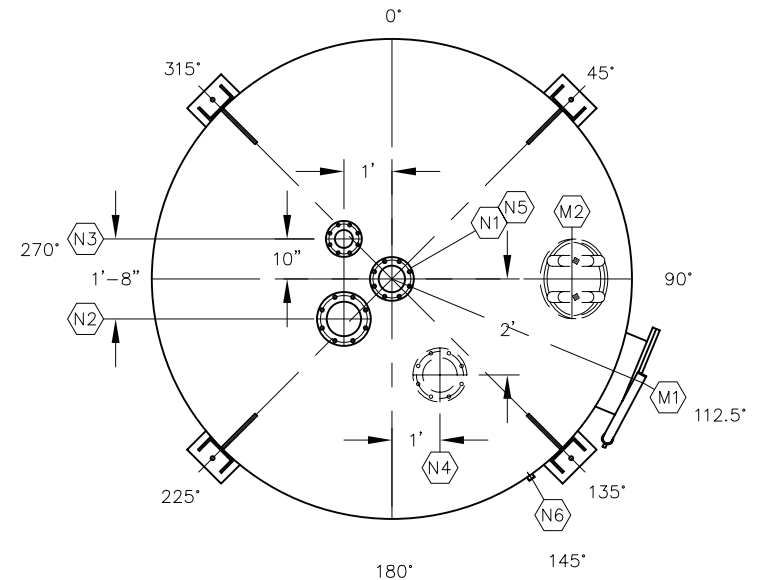

NO.	REVISION	BY	DATE
PROJECT			
C-750-T			
PROJ. NO.	STANDARD		
P.O. NO.			
THIS DRAWING AND DESIGN ARE THE PROPERTY OF TIGG CORP. AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART, NOR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIFICALLY PERMITTED IN WRITING BY TIGG CORP. THIS DRAWING LOANED SUBJECT TO RETURN ON DEMAND.			
DRAWN BY	JB		
DESIGN BY			
CHKD. BY	BB		
DATE	5/8/08		
SCALE	NTS		
		DWG. NO.	REV.
		C-750-T-1001	0



PLAN & ELEVATION